


## TP1 - MANUAL THERMOPRESS FOR ONE SINGLE CERTICARD®



ALUMINIUM BLOCK FOR CERTICARD® PRE-ASSEMBLING OPERATIONS

## TP2 - SEMI AUTOMATIC THERMOPRESS FOR CERTICARD®

LENGTH: 600 MM  
WIDTH: 220 MM  
HEIGHT: 550 MM  
WEIGHT: 30 KG  
VOLTAGE: 230 VCA  
POWER: 800 W  
AIR SUPPLY: 6 ATM

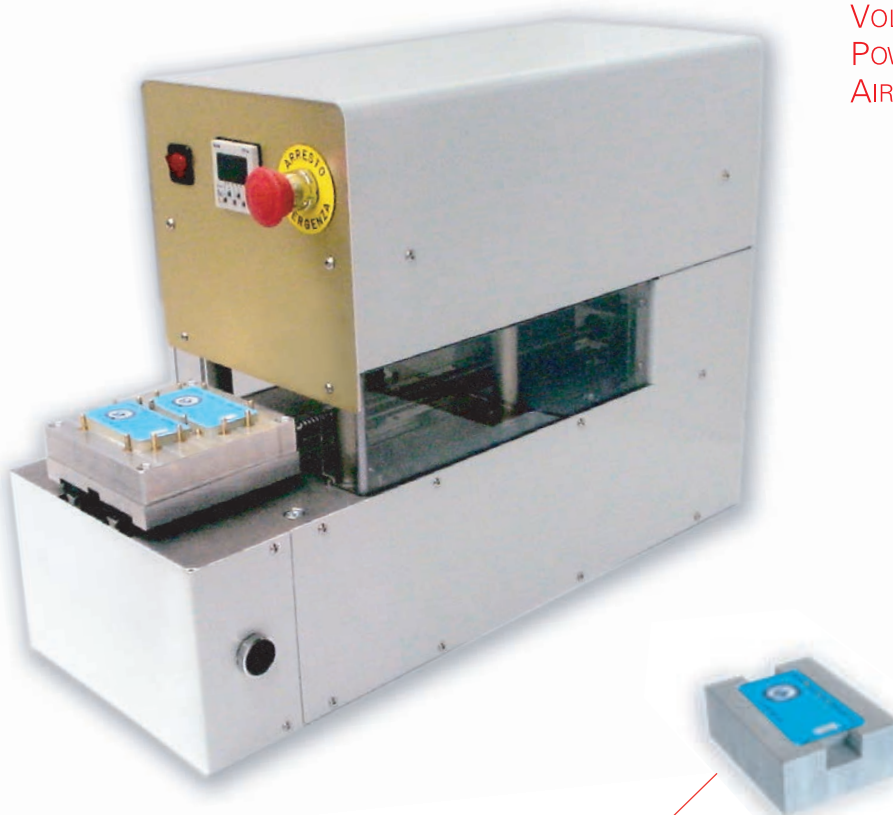

ALUMINIUM BLOCK FOR CERTICARD® PRE-ASSEMBLING OPERATIONS

## TP3 - SEMI AUTOMATIC THERMOPRESS FOR 8 CERTICARD®



LENGTH: 850 MM  
WIDTH: 430 MM  
HEIGHT: 600 MM  
WEIGHT: 80 KG  
VOLTAGE: 230 VCA  
POWER: 800 W  
AIR SUPPLY: 6 ATM

TRAY FOR CERTICARD® LOADING

## APS - MULTIFORMAT INDUSTRIAL PACKAGING SYSTEM

DIMENSIONS: 6,5x5 M

HEIGHT: 2,2 M

INPUT VOLTAGE: 400 V AC 3P+N+G 50 Hz


POWER: 12 kW

COMPRESSED AIR: 6-8 BAR

AIR CONSUMPTION: 700 NL/MIN

OPERATIVE TEMPERATURE: 10°C - 35°C

RELATIVE HUMIDITY: 20%-70% DRY

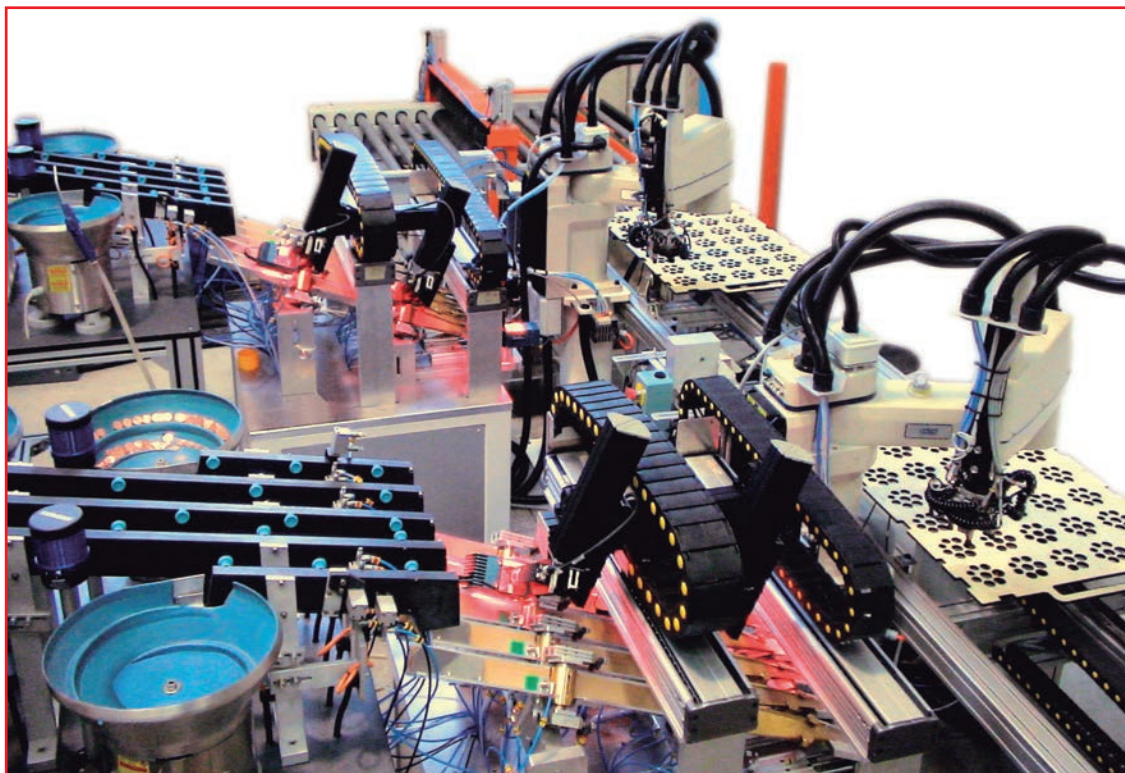

## APL - FULL AUTOMATIC PACKAGING LINE

DIMENSIONS: 2,64x4,6 M

HEIGHT: 2 M

INPUT VOLTAGE: 400 V AC 3P+N+G 50 Hz

POWER: 10 kW

COMPRESSED AIR: 6-8 BAR

AIR CONSUMPTION: 700 NL/ MIN

OPERATIVE TEMPERATURE: 10°C - 35°C

RELATIVE HUMIDITY: 20%-70% DRY

